



TRIPLE SPUR GEAR CHAIN PULLEY BLOCK MODEL M



- ▶ Light weight & sturdy
Ease of handling
- ▶ Lifelong lubrication
Minimal maintenance required
- ▶ Surface hardened gears
Extended working life
- ▶ Use of needle roller bearings
High operating efficiency
- ▶ Smooth passage of load chain
Machined guide rollers
- ▶ Smooth hand chain operation
Unique cover design
- ▶ Self sustaining maintenance free
friction brake
Reduced downtime
- ▶ Grade 80 load chain for strength &
wear resistance
Longer chain life
- ▶ Anti corrosive powder coated finish
Better aesthetics



ALSO AVAILABLE
Ultra S. H. R.
Chain Pulley
Blocks

TRIPLE SPUR GEAR CHAIN PULLEY BLOCK - MODEL M



SPECIFICATIONS / DIMENSIONS (mm)

Capacity	MT	0.5	1	2	2.5	3	5	8	10
Number of falls of load chain	No.	1	1	2	1	1	2	3	4
Dimensions									
A Hook suspension	mm	335	400	461	530	575	805	880	950
with trolley, ranges 1&2	mm	365	430	500	560	705	890	980	950
with trolley, range 3	mm	405	470	540	605	720	-	-	-
B	mm	155	180	180	238	230	280	430	480
C	mm	144	153	153	209	182	209	220	220
H Hook admittance	mm	27	32	32	42	42	51	75	75
● Weight at 3 M	kg	10	13	19	29	27	59	94	130
● Extra weight per additional M lift	kg	1.4	1.8	2.6	3.0	3.0	5.7	7.9	10.1
● Running pull on hand chain	kg	28	30	33	37	36	41	46	43

All Dimensions in mm. Data is subjected to change without prior notice.

Data Tolerance $\pm 10\%$

Hook suspension

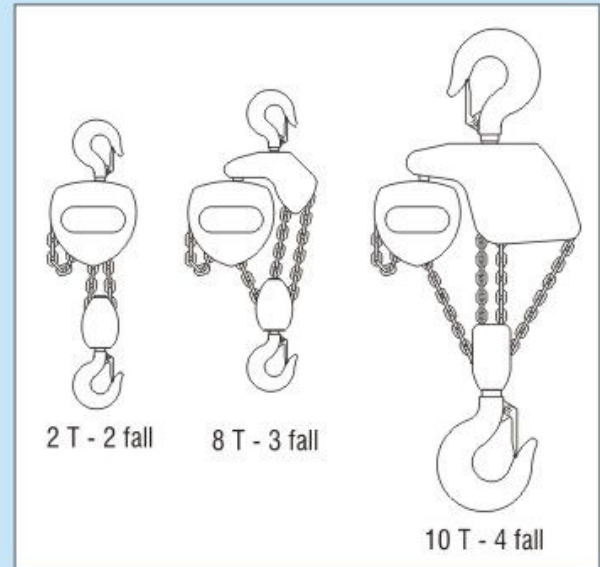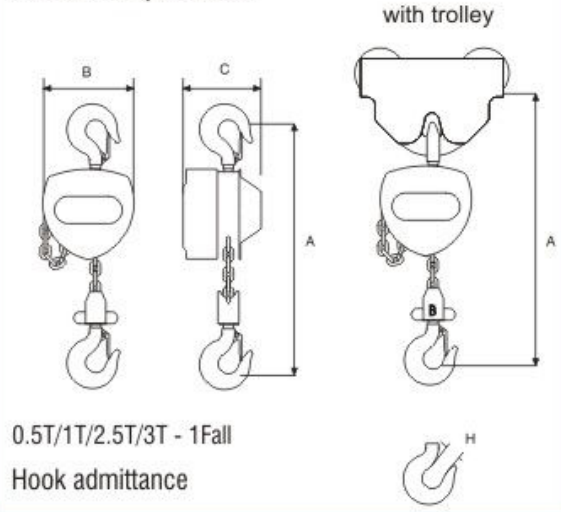

CODE NO 41 : 00 : 1760/LT/CPB (INDEF-M) /09-2011



Manufactured & Marketed by :
HERCULES HOISTS LTD.

CTS No. 43/5, Village Dhamni, Taluka Khalapur,
Khopoli, Dist. Raigad, Maharashtra-410 202. India
Tel. : + 91 (0) 2192-274036/274087/274135
Fax : + 91 (0) 2192-274325
E-mail : enquire@indef.com
Website : <http://www.indef.com>

Dealers name & address

bajaj group