


Horizontal Plate Lifting Clamp

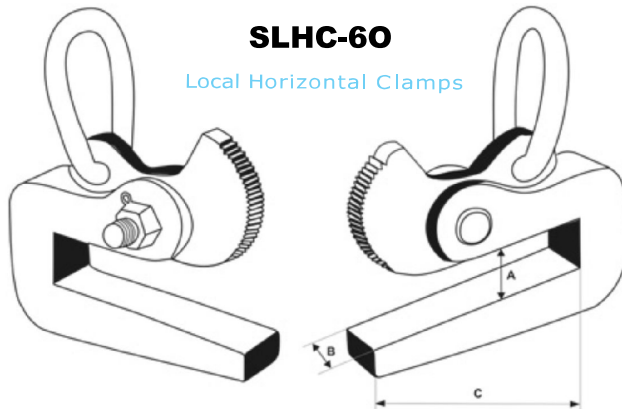

SLHC-60

Local Horizontal Clamps

Horizontal Plate Clamps are designed for flat or horizontal lifting and are generally used in pairs. The gripping cam of hardened steel, prevents the clamp from slipping on the load. The cams are available either with serrated teeth or smooth faced, as requested.


WARNING :

1. Do not exceed working load limit.
2. Inspect clamp before each lift.
3. Do not lift more than one plate or sheet at a time.
4. Position clamp to balanced load.
5. Insert plate or unit to full depth of throat opening.
6. Lift slowly and smoothly. Do not jerk load.
7. Stand clear of load when lifting.
8. Do not use a damaged clamp.
9. Read manufacturer's instructions before Using clamps

HORIZONTAL PLATE LITING CLAMPS WITH HARDENED JAWS							
CAPACITY IN TONS		JAW OPENING A	PLATE ADMIT C	BODY DIA B	CAM DIA	RING SIZE d X D	WEIGHT PER PAIR KGS
PAIR	EACH						
1	0.5	50	150	40	16	16 X 75	12
2	1	60	170	45	16	20 X 85	13.5
3	1.5	70	200	55	20	22 X 95	26.5
5	2.5	85	260	65	25	25 X 95	40
10	5	95	300	90	32	32 X 135	78
20	10	150	400	120	40	45 X 200	160

Dimension x can be altered as per customer's requirement



Specifications given are indicative and are subject to change.



horizontal clamps

SLHC-61

- For horizontal lifting and transportation of steel plates.
- A high lifting capacity.
- Used in pairs (or multiples thereof).
- The HC-61 has an enlarged jaw opening. With better grip

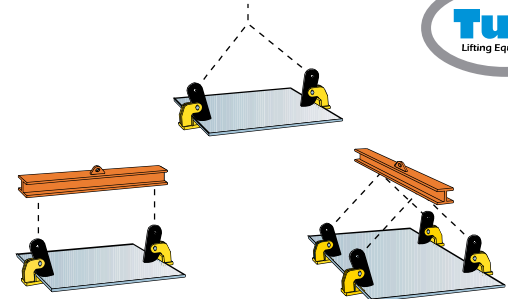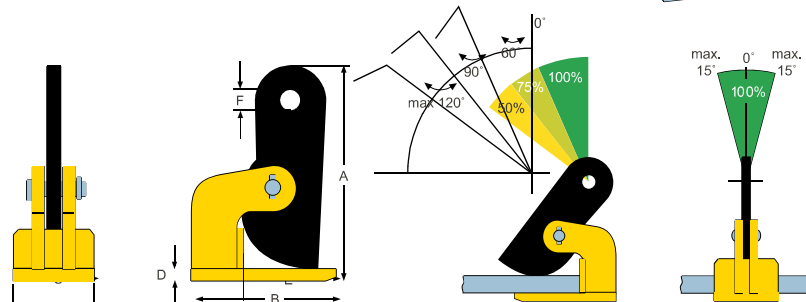

TYPE	CAPACITY	JAW OPENING	(DIMENSION IN MM)						(WEIGHT) (KG/PC)
			A	B	C	D	E	F	
1 SLHC-61	1.000	0 - 35	180	140	65	10	100	25	3
2 SLHC-61	2.000	0 - 60	275	180	80	15	115	30,5	6
3 SLHC-61	3.000	0 - 60	280	180	80	20	115	30,5	6,5
5 SLHC-61	5.000	0 - 60	290	222	90	25	130	30,5	14
8 SLHC-61	8.000	0 - 60	320	225	110	30	140	30,5	18
10 SLHC-61	10.000	0 - 60	325	225	110	35	140	30,5	20

Specifications given are indicative and are subject to change.